


PUSH BUTTON STAGE CABLE PIN ASSIGNMENTS

PIN	SIGNAL
1	<u>REQ 0</u>
2	<u>REQ 1</u>
3	<u>REQ 2</u>
4	<u>REQ 4</u>
5	<u>STOP DEVICE</u>
6	<u>DEVICE HATCH IS OPEN</u>
7	GND
8	+5 V
9	<u>DEVICE IN MOVING LED</u>
10	<u>DEVICE IS IN POSITION</u>
11	SHIELD
12	SPARE
13	SPARE
14	SPARE



END VIEW OF PLUG
PIN MATING FACE
SOCKET MATING FACE IS MIRROR IMAGE


AMP CPC SERIES
SERIES 1
RECEPTACLE 206043-1
PLUG 206044-1
SHELL SIZE 17
ARRANGEMENT 17-14
REVERSED SEX CONNECTORS
A KEYING : 5 KEY SLOTS
(USED ON ALL PUSH BUTTON STAGE CABLES)

UNIVERSITY OF CALIFORNIA LICK OBSERVATORY		PUSH BUTTON STAGE CABLE DEIMOS SPECTROGRAPH	
		REVISION	
07-21-98 ADDED SECOND SHEET		DES'N BY: L. BRESEE	ORIGIN DATE: 03-20-98
		DRAWN BY:	MODIFY DATE: 07-21-98
		PATH: DEIMOS\CABLE7	REV. A
		DWG. NO.	NUM. 1 OF 2
		EL-3097	

AMP CPC SERIES 1
 206044-1 PLUG
 #66566-4 PINS
 #206070-1 CLAMP

BELDEN #9615
 15 WIRE OVERALL BRAID SHIELD CABLE
 22 AWG TINNED COPPER WIRE

AMP CPC SERIES 1
 206044-1 PLUG
 #66566-4 PINS
 #206070-1 CLAMP

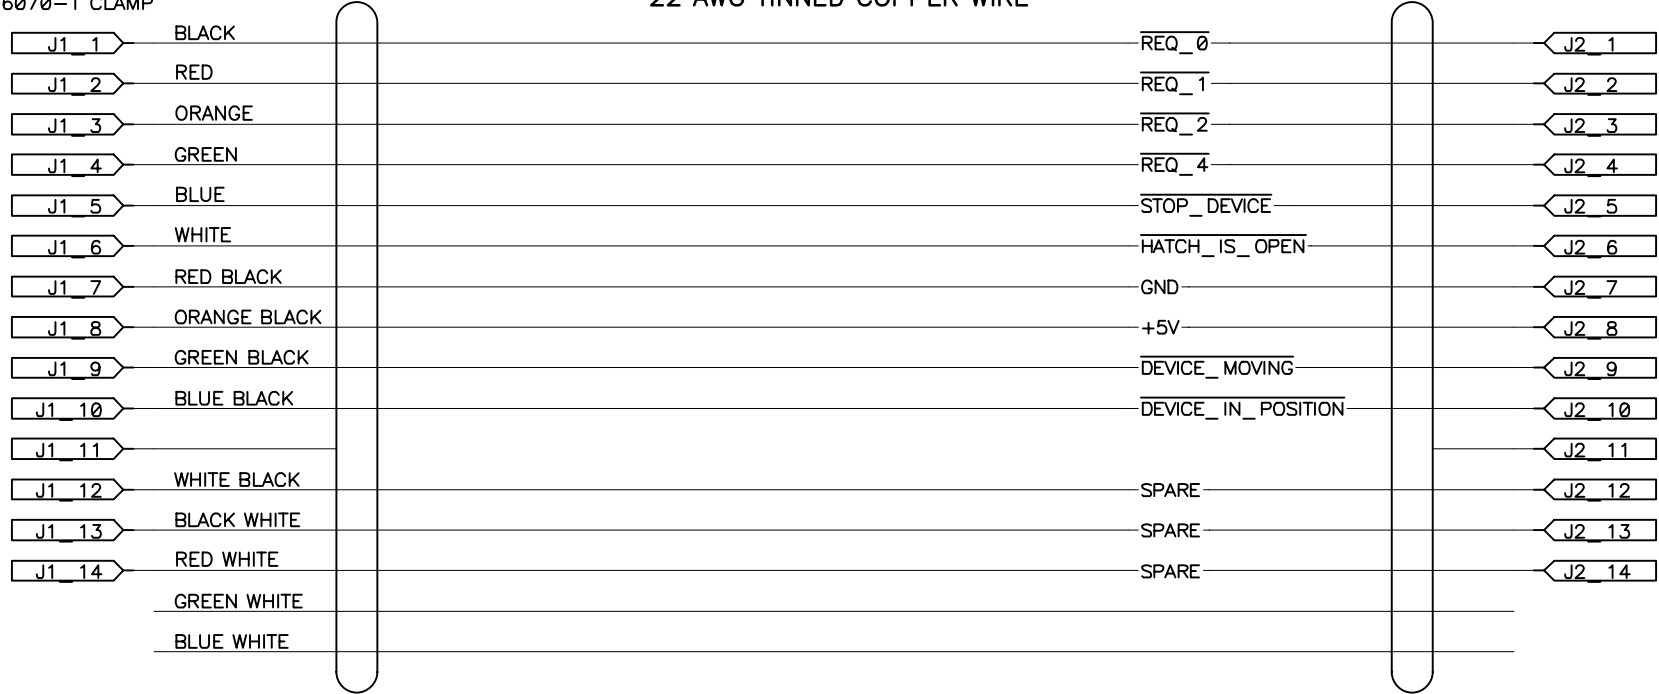

UNIVERSITY OF CALIFORNIA
 LICK OBSERVATORY

PUSH BUTTON STAGE CABLE
 DEIMOS SPECTROGRAPH

REVISION

07-21-98 ADDED SECOND SHEET

DES'N BY: L. BRESEE

ORIGIN DATE: 03-20-98

DWG. NO.

NUM. 2 OF 2

DRAWN BY:

MODIFY DATE: 07-21-98

PATH: DEIMOS\CABLE7

REV. A

EL-3097